








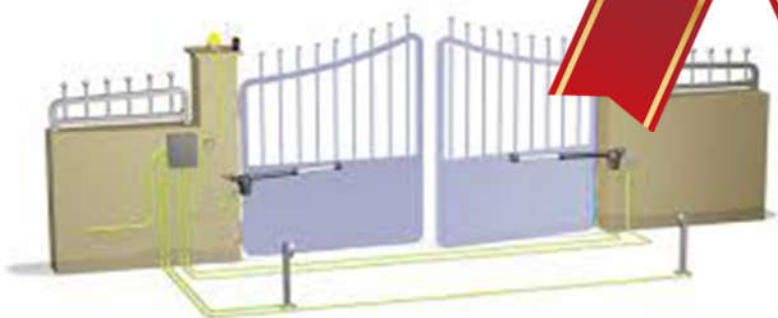


**FAAC**  
*Simply automatic.*

**GENIUS**






Макспринт Компјутери ЛТД ДОО  
Бул. Туристичка бр.4, Охрид  
Охридска банка Жиро сметка:  
530000100483931  
Контакт: 046-262 500 / 070-249 724  
070-212 929  
e-mail:  
prodazba@maksiprint.com.mk

## Barriers – Автоматика за паркинзи

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА СО ДДВ
	<b>Automatic barrier PB301 Complete Kit with 2 remotes</b> Size: 320*245*985mm;Thickness:1.8mm;Color:Silver; Working Power Supply: 220VDC+10%; Working Temperature: -40C ~ 85C; Motor Power: 150w; Lifting speed: 1-6s; Relative humidity: less than 85%. Remote Control Distance: more than 30m; Arm optional: Telescopic Arm 6m;	<b>800€</b>
	<b>Automatic barrier PB302 Complete Kit with 2 remotes</b> Size: 320*245*985mm;Thickness:1.8mm;Color:Silver; Working Power Supply: 220VDC+10%; Working Temperature: -40C ~ 85C; Motor Power: 150w; Lifting speed: 1-6s; Relative humidity: less than 85%. Remote Control Distance: more than 30m; Arm optional: Telescopic Arm 6m;	<b>800€</b>
	<b>Beam for barrier 6m with LED</b>	<b>95€</b>
	<b>Beam for barrier 6m Telescopic 4+2</b>	<b>83€</b>
	<b>Photocells</b>	<b>25€</b>
	<b>Remote Control</b>	<b>12€</b>
	<b>Solar Parking Lock</b>	<b>100€</b>



## Genius/FAAC Barriers - БАРИЕРИ ЗА ПАРКИНЗИ

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА СО ДДВ
	<b><u>BARRIER 24V ELECTROMECHANICAL B614</u></b> Power supply 220-240V ~ 50/60; Hz Electric motor 24V brushed; Max. power 165 W; Max. torque 300 Nm; Back-up batteries Yes (optional); Material Steel; Surface treatment Pre-hot dip galvanized, 20µm thick + polyester powder coated; Encoder Incremental, integrated in the motor; Deceleration type Electronic + mechanical; Beam type Rectangular and rounded; Ambient operating temperature -20°C to +55°C; Protection class IP55 (Electronic control unit) - IP44; Weight 40 Kg Use frequency Continuous use; Electronic equipment E614	<b>1057€</b>
	<b><u>Foundation plate for barrier B614</u></b>	<b>32€</b>
	<b><u>B614 Automatic Barrier with fixing bracket</u></b>	<b>222€</b>

















	<p><b><u>SPIN 4C ENC - 230V AC BARRIER GATE</u></b>                  SPIN 4C ENC - AUTOMATIC BARRIER for motor vehicle Barrier body with incorporated control board LYNX 06 , and 433MHz Receiver with antenna ,springs for SPIN 4 , Power supply 230V 50Hz , Working Temp -20°C - +55°C Integrated control board with separate opening and closing inputs Elektrical and mechanical limit-switches supplied standard Version 230V is supplied with the Encoder to ensure reversing of movement</p>	<p><b>823€</b></p>
	<p><b><u>Foundation Plate with Accessories for SPIN Barrier</u></b></p>	<p><b>32€</b></p>
	<p><b><u>GENIUS frequency moule</u></b>                  FAAC original GENIUS 433 RC . Workson 433 Mhz frequency and FAAC 433 Mhz transmitters manages ECHO'S GENIUS."</p>	<p><b>38€</b></p>
	<p><b><u>Echo TX4 RC 433 MHz Remote Control Transmitter</u></b>                  This remote control of the gate GENIUS ECHO TX4 as a frequency of 433.92 MHz and have 4 button(s). It comes with an instruction and batteries. The Programming of the remote is easy and requires no special equipment</p>	<p><b>24€</b></p>
	<p><b><u>Genius – Pair of 1-SB-VEGA</u></b>                  self Aligning Photocells , range 20m, 24V DC 6100147</p>	<p><b>40€</b></p>
	<p><b><u>Genius Vega WIRELESS Photocells</u></b>                  Power Supply 12-24 V- 12 – 24 Vdc; Absorbed current RX: 30 mA;                  Maximum range: 15m; Transmission of signal: automatic;</p>	<p><b>56€</b></p>
	<p><b><u>Genius intermittent flashing lamp Guard 230V AC 40W</u></b>                  Guard is a new flashing designed to be installed in multiple configurations, allowing maximum flexibility of vertical/horizontal positioning, on pillars or walls. Available in various versions 230V. 6100052</p>	<p><b>34€</b></p>
	<p><b><u>M-ST-DC1</u></b>                  WIFI Smart Door Opener Relay; APP name:TuyaSmart; Work with Amazon Alexa/Google Assistance/IFTTT; Work Voltage: DC7-32V; Wifi Frequency: 2.4GHz; Relay Load: 250V/10A; Work alone, not work with alarm panel together</p>	<p><b>45€</b></p>
	<p><b><u>RTU5024 GSM Door Opener</u></b>                  GSM Frequency, Quad-band 850/900/1800/1900MHz, Digital Output, NC/NO dry contact 3A/240VAC, DC Power supply 9~24VDC/2A, Power consumption, 12V input Max. 50m A/Average 25mA, SIM Card Supporting 3V SIM Card, Temperature range -20~+60 °C, Humidity range Relative humidity 90%, Backup battery 3.7V/900mAH                  Exterior dimension W102mm*D76mm*H27mm</p>	<p><b>65€</b></p>
	<p><b><u>BEAM 3m FOR SPIN 4</u></b>                  Alluminium beam painted with while epoxy powders , complete with retro-reflecting stickers and rubber profile . Dimensions 90x25mm. Beam 4 meter . 58P1803</p>	<p><b>132€</b></p>
	<p><b><u>BEAM 5m FOR SPIN 4</u></b>                  Alluminium beam painted with while epoxy powders , complete with retro-reflecting stickers. Dimensions 100x50mm. Beam 6 meter . 58P1805</p>	<p><b>158€</b></p>
	<p><b><u>BEAM L6000 6m FOR SPIN 6</u></b>                  Alluminium beam painted with while epoxy powders , complete with retro-reflecting stickers. Dimensions 100x50mm. Beam 6 meter . 58P1805</p>	<p><b>182€</b></p>

## Bollard

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА СО ДДВ
	<p><b>FAAC J200 Bollard Series</b> Diameter: 200mm; Cylinder Stroke: 600mm; Rise time: 5sec; Descent Time: 7sec; Suitable for residential applications, providing intelligent control, but preserving the aesthetic impact; Product design streamlined, configurable by selecting the desired installation accessories; Ease of transport, storage and installation, thanks to the weight and content of the product; Simplified maintenance (possible by one person); Hydraulic lock in high position (in case of power failure) with special release key;</p> <p><b>Emergency release with pressostat; Led lights kit; Movement buzzer;</b></p>	<b>2307€</b>
	<p><b>FAAC Remote Control</b> Frequency 433.92MHz; Number of Channels; 2-4;</p>	<b>35€</b>

## Sliding Gate Kits – Мотори за лизгачки врати

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА СО ДДВ
	<p><b>BLIZZARD 500 C ENC -230V SLIDE GATE KIT / 500kg</b> Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with control board SPRINT382 and 433MHz Receiver with antenna ,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55°C Sturdy inner kinematic mechanism Magnetic Limit Switches Electronic Control Board with</p>	<b>375€</b>
	<p><b>BLIZZARD 900 C ENC -230V SLIDE GATE KIT / 900kg</b> Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with control board SPRINT382 and 433MHz Receiver with antenna ,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55° Sturdy inner kinematic mechanism Magnetic Limit Switches Electronic Control Board with</p>	<b>435€</b>
	<p><b>FALCON M14C -230V SLIDE GATE KIT / 1400kg</b> Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with control board SPRINT382 and 433MHz Receiver with antenna ,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55° Optional Encoder installation for obstacle detection Rotating Panel for easer programming</p>	<b>640€</b>
	<p><b>FALCON M20C -230V SLIDE GATE KIT / 2000kg</b> Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with, foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55° Optional Encoder installation for obstacle detection. Rotating Panel for easer programming</p>	<b>710€</b>
	<p><b>Echo TX4 RC 433 MHz Remote Control Transmitter</b> This remote control of the gate GENIUS ECHO TX4 as a frequency of 433.92 MHz and have 4 button(s). It comes with an instruction and batteries. The Programming of the remote is easy and requires no special equipment.</p>	<b>24€</b>
	<p><b>Single-channel receiver GENIUS</b> Single-channel receiver plug FAAC original GENIUS 433 RC . Works on 433 Mhz frequency and FAAC 433 Mhz transmitters manages ECHO'S GENIUS."</p>	<b>40€</b>

	<b>Genius nylon gear rack 30x20</b> 1 meter – 6100344 + welding accessories for 1meter 30x20 6100345	<b>14.5€</b>
	<b>Genius galvanized iron gear rack 30x12,</b> galvanized iron gear rack + welding accessories for 1meter 30x12 - 1 meter - JA146	<b>16€</b>
	<b>Genius – Pair of 1-SB-VEGA</b> Self Aligning Photocells , range 20m, 24V DC 6100147	<b>40€</b>
	<b>Genius Vega WIRELESS Photocells</b> Power Supply 12-24 V- 12 – 24 Vdc; Absorbed current RX: 30 mA; Maximum range: 15m; Transmission of signal: automatic;	<b>56€</b>
	<b>Genius intermittent flashing lamp Guard 230V AC 40W</b>	<b>40€</b>
	<b>Genius – Outdoor key</b> Operated selector switch ,one contact in NA/NC exchange ,Anti Break - in	<b>23€</b>
	<b>M-ST-DC1</b> WIFI Smart Door Opener Relay; APP name:TuyaSmart; Work with Amazon Alexa/Google Assistance/IFTTT; Work Voltage: DC7-32V; Wifi Frequency: 2.4GHz; Relay Load: 250V/10A; Work alone, not work with alarm panel together	<b>45€</b>
	<b>RTU5024 GSM Door Opener</b> GSM Frequency,Quad-band 850/900/1800/1900MHz, Digital Output, NC/NO dry contact 3A/240VAC, DC Power supply 9~24VDC/2A , 12V input Max. 50m A/Average 25mA, SIM Card Supporting 3V SIM Card, Humidity range Relative humidity 90% , Backup battery 3.7V/900mAH, Exterior dimension 102mm*D76mm*H27mm	<b>65€</b>

## Swing Gate Kits - МОТОРИ ЗА КРИЛНИ ПОРТИ

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА СО ДАВ
	<b>GENIUS G-BAT400 - 230V AC SWING GATE KIT 4 meter</b> Kit for gates with two Swing leaves , up to 4 meter of width ,complete with accessories , with control board BRAIN 17 / 230V and 433MHz Receiver with antenna ,Ecobox with Brand , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Power supply 230V 50Hz , Working Temp -20°C - +55°C Easy release through a user friendly lever . Opening and closing slow down available in both versions	<b>525€</b>
	<b>GENIUS MISTRAL 400 - 230V AC SWING GATE KIT 4 meter</b> Kit for gates with two Swing leaves , up to 4 meter of width ,complete with accessories , with control board BRAIN 17 / 230V and 433MHz Receiver with antenna ,Ecobox with Brand , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Power supply 230V 50Hz , Working Temp -20°C - +55°C Release through a user friendly accessory lever Opening and closing slow down available in both versions	<b>650€</b>

Цените се END USER и истите важат за крајни корисници.

Цените се претставени со пресметан ДДВ 18% .

Гаранција на производите е од 1-12 месеци.

МАКСИПРИНТ го задржува правото на промена на цените без претходна најава.



**We confirm that  
the Company**

**Maksiprint Kompjuteri LTD**

Bul.Turisticka br.4, OHRID

*is our authorized Distributor for FAAC &  
Genius equipment in the territory of :*

**Macedonia**

**FAAC**  
FAAC S.p.A. Soc. Unipersonale  
Via Caleri, 10 - 40089 Zola Predosa (BO) Italy  
TEL. +39 051 61724 - FAX +39 051 0857820  
C. F. e P. IVA 03820731200

**FAAC**  
Simply automatic.