




FAAC
Simply automatic.

GENIUS



Максипринт Компјутери ЛТД ДОО
Бул. Туристичка бр.4, Охрид
Охридска банка Жиро сметка:
530000100483931
Контакт: 046-262 500 / 070-249 724
070-212 929
e-mail:
prodazba@maksiprint.com.mk

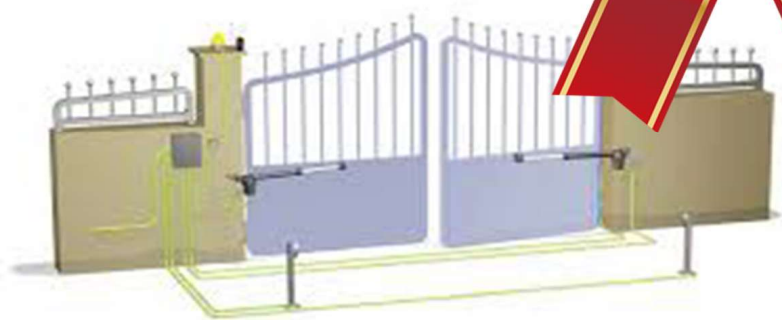

Parking Locks

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	Solar Parking Lock Control Distance: 30–50 meters; Rise and Fall Time: Less than 3–5 seconds; Size: 460 × 460 × 100MM; Rising Height: 40CM; Drop Height: 8CM; Waterproof Grade: IP67; Weight: 6–7 KG;	6.500ден
	Battery Powered Parking Lock Size: 450 × 400 × 80mm; Lifting Height: 400mm; Descent Height: 75mm; Running Time: ≤ 5 Seconds; Control Distance: ≥ 30 Meters; Product Weight: 7.5 KG; Supply Battery: Alkaline / Lithium Battery; Rated Voltage: DC 6V; Static Voltage: ≤ 0.8mA; Waterproof: IP68; Working Temperature: -40°C ± 70°C;	4.500ден

Barriers – Автоматика за паркинзи

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	Automatic barrier PB323 Kit With Rect. Telescopic 4+2 Arm Voltage: 24V; Current: 6A; Insulation Class: F; Output Efficiency: 100W; Gate Operation Time: 0.8–5s; Operating Temperature Range: -40°C to +60°C (-40°F to +140°F) – below -20°C / -4°F requires a heating element; Humidity: ≤85%; Altitude: ≤1000m; Dimensions: 860mm (H) × 320mm (W) × 200mm (D);	35.960ден
	Automatic barrier PB301 Kit With Rect. Telescopic 4+2m Arm Chassis Size: 320 × 245 × 985 mm; Color: Silver; Chassis Thickness: 1.5 mm; Open Time: 1 – 6 s (adjustable); Motor Power: 120W – 150W (optional); Working Power Supply: 220V; Operating Temperature: -40°C to +85°C; Remote Control Distance: ≥ 30 m;	37.820ден
	Automatic barrier PB302 Kit With Elliptic 6m Arm Chassis Size: 355 × 255 × 1035 mm; Color: Silver; Chassis Thickness: 1.5 mm; Open Time: 1 – 6 s (adjustable); Motor Power: 120W – 150W (optional); Working Power Supply: 220V; Operating Temperature: -40°C to +85°C; Remote Control Distance: ≥ 30 m;	54.560ден
	Arm Rest	2.790ден
	Elliptic Beam for barrier 6m with LED	5.890ден
	Rectangle Beam for barrier 6m Telescopic 4+2	5.145ден
	Infrared photocells ACM-S408	1.800ден
	Remote Control	745ден

FAAC Barriers - БАРИЕРИ ЗА ПАРКИНЗИ

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	Faac Barrier 24V B614 Kit with Beam 6M Power supply 220-240V ~ 50/60; Hz Electric motor 24V brushed; Max. power 165 W; Max. torque 300 Nm; Back-up batteries Yes (optional); Material Steel; Surface treatment Pre-hot dip galvanized, 20µm thick + polyester powder coated; Encoder Incremental, integrated in the motor; Deceleration type Electronic + mechanical; Beam type Rectangular and rounded; Ambient operating temperature -20°C to +55°C; Protection class IP55 (Electronic control unit) - IP44; Weight 40 Kg Use frequency Continuous use; Electronic equipment E614	84.500ден
	Faac B614 Beam 5M - 428091	ден
	Faac B614 Integrated Flashing Lamp - 410032	4.530ден
	Faac Light Assembly Kit - 390184	4.570ден
	Faac Light Connection Kit – 390992 - 390993	7.150ден

Bollard

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	FAAC J200 Bollard Series Diameter: 200mm; Cylinder Stroke: 600mm; Rise time: 5sec; Descent Time: 7sec; Suitable for residential applications, providing intelligent control, but preserving the aesthetic impact; Product design streamlined, configurable by selecting the desired installation accessories; Ease of transport, storage and installation, thanks to the weight and content of the product; Simplified maintenance; Hydraulic lock in high position with special release key; Emergency release with pressostat; Led lights kit; Movement buzzer;	124.000ден

Sliding Gate Kits – Мотори за лизгачки врати

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	BLIZZARD 500 C ENC -230V SLIDE GATE KIT / 500kg Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with control board SPRINT382 and 433MHz Receiver with antenna ,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55°C Sturdy inner kinematic mechanism Magnetic Limit Switches Electronic Control Board with	25.870ден
	BLIZZARD 900 C ENC -230V SLIDE GATE KIT / 900kg Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with control board SPRINT382 and 433MHz Receiver with antenna ,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55°C Sturdy inner kinematic mechanism Magnetic Limit Switches Electronic Control Board with	29.790ден
	FALCON M14C -230V SLIDE GATE KIT / 1400kg Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with control board SPRINT382 and 433MHz Receiver with antenna ,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55° Optional Encoder installation for obstacle detection Rotating Panel for easier programming	34.990ден
	FALCON M20C -230V SLIDE GATE KIT / 2000kg Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55° Optional Encoder installation for obstacle detection. Rotating Panel for easier programming	44.500ден
	Genius nylon gear rack 30x20 1 meter – 6100344 + welding accessories for 1meter 30x20 6100345	950ден
	Genius galvanized iron gear rack 30x12 galvanized iron gear rack + welding accessories for 1meter 30x12 - 1 meter - JA146	1.200ден

Swing Gate Kits - МОТОРИ ЗА КРИЛНИ ПОРТИ

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	GENIUS G-BAT400 - 230V AC SWING GATE KIT 4 meter Kit for gates with two Swing leaves , up to 4 meter of width ,complete with accessories , with control board BRAIN 17 / 230V and 433MHz Receiver with antenna ,Ecobox with Brand , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Power supply 230V 50Hz , Working Temp -20°C - +55°C Easy release through a user friendly lever . Opening and closing slow down available in both versions	35.500ден
	GENIUS MISTRAL 400 - 230V AC SWING GATE KIT 4 meter Kit for gates with two Swing leaves , up to 4 meter of width ,complete with accessories , with control board BRAIN 17 / 230V and 433MHz Receiver with antenna ,Ecobox with Brand , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Power supply 230V 50Hz , Working Temp -20°C - +55°C Release through a user friendly accessory lever Opening and closing slow down available in both versions	36.740ден

Accessories

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	M-UHF5 Pro Access Control Card Reader; Operating frequency: 860–960MHz; Dimensions: 180 × 180 × 60 mm; Interface: USB, Bluetooth, RS485, Wiegand; Material: Acrylic panel;	24.800ден
	M-DK001 UHF QR Code Access Control Card Reader; Frequency: 125KHz / 13.56MHz; Dimensions: 86 × 86 × 7 mm; Output: Wiegand 26/34, RS232, USB; Material: ABS material, tempered glass panel;	7.690ден
	UHF CARD	180ден
	UHF LABEL	180ден
	Echo TX4 RC 433 MHz Remote Control Transmitter This remote control of the gate GENIUS ECHO TX4 as a frequency of 433.92 MHz and have 4 button(s). It comes with an instruction and batteries. The Programming of the remote is easy and requires no special equipment.	1.500ден
	Single Channel Receiver GENIUS Single-channel receiver plug FAAC original GENIUS 433 RC . Works on 433 Mhz frequency and FAAC 433 Mhz transmitters manages ECHO'S GENIUS."	2.480ден
	Genius Vega WIRED Photocells Self Aligning Photocells , range 20m, 24V DC 6100147	2.480ден
	Genius Vega WIRELESS Photocells Power Supply 12-24 V- 12 – 24 Vdc; Absorbed current RX: 30 mA; Maximum range: 15m; Transmission of signal: automatic;	3.500ден
	Infrared photocells ACM-S408	1.800ден
	Infrared photocells ACM-S409	1.800ден
	Genius intermittent flashing lamp Guard 230V AC 40W	2.775ден

	Release Lock with Key	1.750ден
	Genius – Outdoor key Optated perated selector switc ,one contact in NA/NC exchange ,Anti Break - in	1.750ден
	M-ST-DC1 WIFI Smart Door Opener Relay; APP name:TuyaSmart; Work with Amazon Alexa/Google Assistance/IFTTT; Work Voltage: DC7-32V; Wifi Frequency: 2.4GHz; Relay Load: 250V/10A; Work alone, not work with alarm panel together	2.790ден
	RTU5024 GSM Door Opener GSM Frequency,Quad-band 850/900/1800/1900MHz, Digital Output, NC/NO dry contact 3A/240VAC, DC Power supply 9~24VDC/2A , 12V input Max. 50m A/Average 25mA, SIM Card Supporting 3V SIM Card, Humidity range Relative humidity 90% , Backup battery 3.7V/900mAH, Exterior dimension 102mm*D76mm*H27mm	4.990ден

Цените се END USER и истите важат за крајни корисници.

Цените се претставени со пресметан ДДВ 18% .

Гаранција на производите е од 1-12 месеци.

МАКСИПРИНТ го задржува правото на промена на цените без претходна најава.