MAKSIPRINT
DISTRIBUTION & SECURITY

ЛИЗГАЧКИ ВРАТИ И РАМПИ

ЦЕНОВНИК

ЛИЦЕНЦИРАНА КОМПАНИЈА ЗА ТЕХНИЧКО ОБЕЗБЕДУВАЊЕ
МАКСИПРИНТ

FAAC
Simply automatic.

GENIUS

CERTIFIED FAAC Simply automatic. GENIUS GATE AUTOMATION DISTRIBUTOR

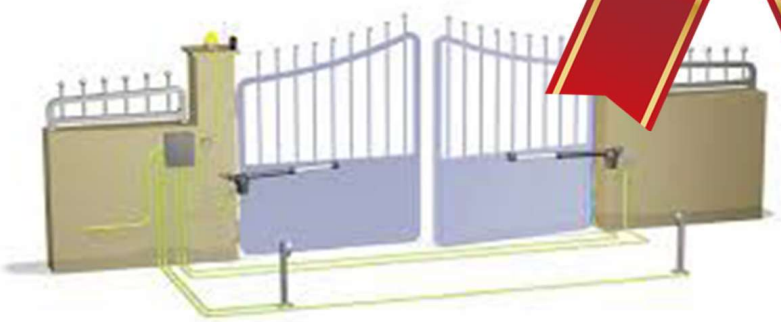

Максипринт Компјутери ЛТД ДОО
Бул. Туристичка бр.4, Охрид
Охридска банка Жиро сметка:
530000100483931
Контакт: 046-262 500 / 070-249 724
070-212 929
e-mail:
prodazba@maksiprint.com.mk

MAKSPRINT
DISTRIBUTION & SECURITY

GENIUS

Parking Card Ticket System

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	Parking Card Ticket System Accessories Dimension: 1070*340*280(mm); Housing Material: Steel & Tempered glass Housing Color: Varied; Support Built-in Reader; IC/ID/RFID, Barcode ticket Com Mode; RS485. Rear TCP/IP; Communication distance: 1200m(RS485) Data Transmission speed: 4800bps/100m; Offline storage Capacity: 10000pcs (Extensible) Working Temperature: -30°C--70°C; Working Conditional: Indoor / Outdoor	**350.000ден**
	Traffic Light Product name:Traffic Light; Material: Aluminum Alloy+PC Light source: bright led chip; Power: 12W; LED Color: Red Green Reliability: MTBF≥10000 hours; Relative Humidity: ≤95%; Application: Road Safety Led Warning Lights; Lamp Diameter: 1000mm/200mm/300mm/400mm	**12.000ден**

Parking Locks

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	Solar Parking Lock **Control Distance:** 30–50 meters; **Rise and Fall Time:** Less than 3–5 seconds; **Size:** 460 × 460 × 100MM; **Rising Height:** 40CM; **Drop Height:** 8CM; **Waterproof Grade:** IP67; **Weight:** 6–7 KG;	**5.500ден**
	Battery Powered Parking Lock Size: 450 × 400 × 80mm; Lifting Height: 400mm; Descent Height: 75mm; Running Time: ≤ 5 Seconds; Control Distance: ≥ 30 Meters; Product Weight: 7.5 KG; Supply Battery: Alkaline / Lithium Battery; Rated Voltage: DC 6V; Static Voltage: ≤ 0.8mA; Waterproof: IP68; Working Temperature: -40℃ ± 70℃;	**3.500ден**

Barriers – Автоматика за паркинзи

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	Automatic barrier PB323 Kit With Rect. Telescopic 4+2 Arm Voltage: 24V; Current: 6A; Insulation Class: F; Output Efficiency: 100W; Gate Operation Time: 0.8–5s; Operating Temperature Range: -40°C to +60°C (-40°F to +140°F) – below -20°C / -4°F requires a heating element; Humidity: ≤85%; Altitude: ≤1000m; Dimensions: 860mm (H) × 320mm (W) × 200mm (D);	**35.960ден**
	Automatic barrier PB301 Kit With Rect. Telescopic 4+2m Arm Chassis Size: 320 × 245 × 985 mm; Color: Silver; Chassis Thickness: 1.5 mm; Open Time: 1 – 6 s (adjustable); Motor Power: 120W – 150W (optional); Working Power Supply: 220V; Operating Temperature: -40°C to +85°C; Remote Control Distance: ≥ 30 m;	**37.820ден**
	Automatic barrier PB302 Kit With Elliptic 6m Arm Chassis Size: 355 × 255 × 1035 mm; Color: Silver; Chassis Thickness: 1.5 mm; Open Time: 1 – 6 s (adjustable); Motor Power: 120W – 150W (optional); Working Power Supply: 220V; Operating Temperature: -40°C to +85°C; Remote Control Distance: ≥ 30 m;	**54.560ден**
	Arm Rest	**2.790ден**

01.10.2026

	Elliptic Beam for barrier 6m with LED	**5.890ден**
	Rectangle Beam for barrier 6m Telescopic 4+2	**5.145ден**
	Infrared photocells ACM-S408	**1.800ден**
	Remote Control	**745ден**

FAAC Barriers - БАРИЕРИ ЗА ПАРКИНЗИ

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	Faac Barrier 24V B614 Kit with Beam 6M Power supply 220-240V ~ 50/60; Hz Electric motor 24V brushed; Max. power 165 W; Max. torque 300 Nm; Back-up batteries Yes (optional); Material Steel; Surface treatment Pre-hot dip galvanized, 20µm thick + polyester powder coated; Encoder Incremental, integrated in the motor; Deceleration type Electronic + mechanical; Beam type Rectangular and rounded; Ambient operating temperature -20°C to +55°C; Protection class IP55 (Electronic control unit) - IP44; Weight 40 Kg Use frequency Continuous use; Electronic equipment E614	**84.500ден**
	Faac B614 Beam 5M - 428091	**ден**
	Faac B614 Integrated Flashing Lamp - 410032	**4.530ден**
	Faac Light Assembly Kit - 390184	**4.570ден**
	Faac Light Connection Kit – 390992 - 390993	**7.150ден**

Bollard

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	FAAC J200 Bollard Series Diameter: 200mm; Cylinder Stroke: 600mm; Rise time: 5sec; Descent Time: 7sec; Suitable for residential applications, providing intelligent control, but preserving the aesthetic impact; Product design streamlined, configurable by selecting the desired installation accessories;Ease of transport, storage and installation, thanks to the weight and content of the product;Simplified maintenance; Hydraulic lock in high position with special release key; **Emergency release with pressostat; Led lights kit;Movement buzzer;**	**124.000ден**

Sliding Gate Kits – Мотори за лизгачки врати

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	BLIZZARD 500 C ENC -230V SLIDE GATE KIT / 500kg Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with control board SPRINT382 and 433MHz Receiver with anthenna ,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55°C Sturdy inner kinematic mechanism Magnetic Limit Switches Electronic Control Board with	**29.990ден**
	BLIZZARD 900 C ENC -230V SLIDE GATE KIT / 900kg Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with control board SPRINT382 and 433MHz Receiver with anthenna ,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55° Sturdy inner kinematic mechanism Magnetic Limit Switches Electronic Control Board with	**34.700ден**
	FALCON M14C -230V SLIDE GATE KIT / 1400kg Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with control board SPRINT382 and 433MHz Receiver with anthenna ,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55° Optional Encoder installation for obstacle detection Rotating Panel for easer programming	**44.500ден**
	FALCON M20C -230V SLIDE GATE KIT / 2000kg Irreversible electro-mechanical Gear motor for moving heavy sliding gates, with,foundation plate for Blizzard , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Lock With Key Switc , Power supply 230V 50Hz , Working Temp -20°C - +55° Optional Encoder installation for obstacle detection. Rotating Panel for easer programming	**49.400ден**
	Genius nylon gear rack 30x20 1 meter – 6100344 + welding accessories for 1meter 30x20 6100345	**950ден**
	Genius galvanized iron gear rack 30x12 galvanized iron gear rack + welding accessories for 1meter 30x12 - 1 meter - JA146	**1.200ден**

MAKSPRINT
DISTRIBUTION & SECURITY

GENIUS

Swing Gate Kits - МОТОРИ ЗА КРИЛНИ ПОРТИ

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	GENIUS G-BAT400 - 230V AC SWING GATE KIT 4 meter Kit for gates with two Swing leaves , up to 4 meter of width ,complete with accessories , with control board BRAIN 17 / 230V and 433MHz Receiver with anthenna ,Ecobox with Brand , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Power supply 230V 50Hz , Working Temp -20°C - +55°C Easy release through a user friendly lever . Opening and closing slow down available in both versions	**35.500ден**
	GENIUS MISTRAL 400 - 230V AC SWING GATE KIT 4 meter Kit for gates with two Swing leaves , up to 4 meter of width ,complete with accessories , with control board BRAIN 17 / 230V and 433MHz Receiver with anthenna ,Ecobox with Brand , 4 channel transmitter Echo TX4 , Pair IR Photocells Vega-Genius , Flashing Lamp , Power supply 230V 50Hz , Working Temp -20°C - +55°C Release through a user friendly accessory lever Opening and closing slow down available in both versions	**41.600ден**

Accessories

МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
	M-UHF5 Pro Access Control Card Reader; Operating frequency: 860–960MHz; Dimensions: 180 × 180 × 60 mm; Interface: USB, Bluetooth, RS485, Wiegand; Material: Acrylic panel;	**24.800ден**
	M-DK001 UHF QR Code Access Control Card Reader; Frequency: 125KHz / 13.56MHz; Dimensions: 86 × 86 × 7 mm; Output: Wiegand 26/34, RS232, USB; Material: ABS material, tempered glass panel;	**7.690ден**
	UHF CARD	**180ден**
	UHF LABEL	**180ден**
	Echo TX4 RC 433 MHz Remote Control Transmitter This remote control of the gate GENIUS ECHO TX4 as a frequency of 433.92 MHz and have 4 button(s). It comes with an instruction and batteries. The Programming of the remote is easy and requires no special equipment.	**1.500ден**
	Single Channel Receiver GENIUS Single-channel receiver plug FAAC original GENIUS 433 RC . Works on 433 Mhz frequency and FAAC 433 Mhz transmitters manages ECHO'S GENIUS."	**2.500ден**
	Genius Vega WIRED Photocells Self Aligning Photocells , range 20m, 24V DC 6100147	**2.500ден**

01.10.2026

	Genius Vega WIRELESS Photocells Power Supply 12-24 V- 12 – 24 Vdc; Absorbed current RX: 30 mA; Maximum range: 15m; Transmission of signal: automatic;	**3.500ден**
	Infrared photocells ACM-S408	**1.800ден**
	Infrared photocells ACM-S409	**1.800ден**
	Genius intermittent flashing lamp Guard 230V AC 40W	**2.775ден**
	Release Lock with Key	**1.750ден**
	Genius – Outdore key Oprtated perated selector switc ,one contact in NA/NC exchange ,Anti Break - in	**1.750ден**
	M-ST-DC1 WIFI Smart Door Opener Relay; APP name:TuyaSmart; Work with Amazon Alexa/Google Assistance/IFTTT; Work Voltage: DC7-32V; Wifi Frequency: 2.4GHz; Relay Load: 250V/10A; Work alone, not work with alarm panel together	**2.790ден**
	RTU5024 GSM Door Opener GSM Frequency,Quad-band 850/900/1800/1900MHz, Digital Output, NC/NO dry contact 3A/240VAC, DC Power supply 9~24VDC/2A , 12V input Max. 50m A/Average 25mA, SIM Card Supporting 3V SIM Card, Humidity range Relative humidity 90% , Backup battery 3.7V/900mAH, Exterior dimension 102mm*D76mm*H27mm	**4.990ден**

Цените се END USER и истите важат за крајни корисници.

Цените се претставени со пресметан ДДВ 18% .

Гаранција на производите е од 1-12 месеци.

МАКСИПРИНТ го задржува правото на промена на цените без претходна најава.

01.10.2026